

Measuring Airport Similarity to Create a Towering Decision Aid

A Technical Report submitted to the Department of Systems and Information Engineering

Presented to the Faculty of the School of Engineering and Applied Science

University of Virginia • Charlottesville, Virginia

In Partial Fulfillment of the Requirements for the Degree

Bachelor of Science, School of Engineering

Mason Jordan

Spring 2020

Technical Project Team Members

Austin Anderson

Toby Hansford

Sragdhara Khakurel

Chris Marshall

Michael Quinn

Katherine Taylor

Amy Xie

On my honor as a University Student, I have neither given nor received unauthorized aid on this assignment
as defined by the Honor Guidelines for Thesis-Related Assignments

Cody Fleming, Department of Systems and Information Engineering

Measuring Airport Similarity to Create a Towering Decision Aid

Austin Anderson
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
ada9cu@virginia.edu

Toby Hansford
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
tsh2ac@virginia.edu

Mason Jordan
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
mej8bq@virginia.edu

Sragdhara Khakurel
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
sk3db@virginia.edu

Chris Marshall
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
cwm3vp@virginia.edu

Michael Quinn
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
mj4my@virginia.edu

Katherine Taylor
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
kjt4wx@virginia.edu

Amy Xie
Engineering Systems and
Environment
University of Virginia
Charlottesville, Virginia
ax5a@virginia.edu

Abstract— The focus of this project was on formulating a model and decision support tool to aid in the decision to build and maintain an Air Traffic Control Tower (ATCT). An important aspect of air travel are ATCTs, towers that help facilitate communication between the airport system and airplanes ascending and descending. ATCTs bring economic, safety, and efficiency benefits to airports and nearby communities. Currently, the Federal Aviation Administration (FAA) uses a document outlining a benefit-cost ratio for building a new tower, with tower funding provided if the ratio is greater than 1. However, the current policy lacks a comprehensive and systematic assessment of factors that influence both costs and benefits to operators and the region.

To address these issues, we started by speaking with air traffic stakeholders and then began to collect data from a variety of aviation datasets. Based on the collected data, we identified economy, safety, and efficiency as our three areas of focus. With this data, we were able to compute the similarity, using hierarchical clustering, of a given airport to currently towered airports based on data from the economy, safety, and efficiency sources. We then built an interactive interface to display these similarities and provide information for airports to contact the similar airports.

Keywords—Air Traffic Control, Systems Analysis, Clustering

I. INTRODUCTION

Air Traffic Control Towers (ATCTs) have the primary responsibility for preventing collisions between aircraft and other hazards [1]. In the United States, there are approximately 500 towered airports, and 20,000 non-towered airports [2]. Of these approximately 500 towered airports, only 264 are directly run by the Federal Aviation Administration (FAA), the rest are contracted out, at the cost of 26 percent of an FAA tower. To establish a new tower, the FAA has several criteria, the most important being a benefit-cost analysis of the tower establishment. However, the FAA has not rerun the benefit-cost ratios for existing towers since 2006, and its methodology is biased towards airports with higher operational volumes.

The benefit-cost analysis method the FAA uses to determine whether an airport needs a tower is outdated and inflexible. As the FAA has constrained resources and budget, and the cost to build a physical tower increases, smaller airports may desire more information about the benefits a tower would bring to their airport. We propose an interface that helps smaller airports interested in towered find similar airports based on metrics about economics, safety, and efficiency. To determine which airports are most similar, we used a hierarchical clustering algorithm.

II. BACKGROUND

Air travel has become increasingly important in the United States for both business and leisure. In turn, issues with congestion, funding, and the environment are more prevalent than ever before. Therefore, updated air traffic control schemes and infrastructure are needed to improve the shortcomings of the current system. ATCTs are a service provided at airports to help improve and control air traffic through direction and advisory services [1]. ATCTs have a clear benefit of preventing collisions and allowing for more efficient flights at larger airports with commercial carriers. The FAA builds ATCTs in Class B, C, and D airspaces and generally does not build ATCTs in other airspace classes. Currently, the FAA determines whether or not to fund the building and operating of these towers at airports based on the document Establishment and Discontinuance Criteria for Air Traffic Control Towers (FAA-APO-90-7).

The Establishment and Discontinuance Criteria for Air Traffic Control Towers document outlines a benefit-cost ratio, comprising safety and efficiency as benefit factors [3]. If the ratio is above 1, the tower will be funded, if below 1; the tower will not be funded. The existing guidelines put an emphasis on the benefits outweighing the costs. This constitutes a problem when both the benefits and the costs are very high or small. The ratio is also outdated in terms of benefits and costs, as it was last updated in 1990. Additionally, because the current criteria are outdated, they are biased against the class D airspace. This may make it difficult for small airports to obtain funding for a tower.

However, smaller airports are in need of these towers as they not only lead to increased safety and efficiency, but they also economically benefit the surrounding community from additional commercial and corporate traffic.

III. APPROACH

A. Data Collection

Based on conversations with our client and other professionals in the aviation industry, our team decided to focus on 3 metrics: efficiency, safety, and economy. All of our data was collected from online databases, and include data through December of 2019. The efficiency data, consisting of volume data for different types of flights, was from the FAA's Operations System Network (OPSNET) database and included all flights in the calendar year 2019. The safety data was from a series of incident reports recorded by the National Transportation Safety Board (NTSB) dating back to 1982. The information contained in each report includes the date, location, fatalities, and aircraft damage. We consolidated the safety data to include one entry per airport by aggregating the incident reports. From data provided by the client, we labeled which airports had ATCTs, and removed accidents prior to the tower date. Lastly, the economic data was collected from various state aviation economic impact studies and includes data from 2003 to 2018. We were able to find economic output, employment, and wage data on airports in 26 of the 50 states. The data was then adjusted for inflation to be in terms of 2019 dollars. We compiled all the data into a data frame for each of our metrics using Microsoft SQL server and created a combined dataset based on airport code. We were able to find data on all of our metrics for 228 airports.

B. Analysis Method

We chose to limit our analysis options to unsupervised learning techniques as we did not have a clear feature label for our airports. Unsupervised techniques allowed us to study the similarities between airports in terms of our metrics. Clustering algorithms lend themselves well to unsupervised learning, as they look more at the similarities and dissimilarities of the data rather than a fixed output. Cluster validation showed hierarchical clustering to be the best method for performing unsupervised learning on our data, over k-means clustering. Hierarchical clustering has the additional bonus of not requiring the number of clusters to be specified prior to running the algorithm, and the result can be split into clusters based on visual inspection. To conduct our analysis, we followed the method in the textbook *Practical Guide to Cluster Analysis in R* [4].

Hierarchical clustering is a "recursive partitioning of a dataset into successively smaller clusters [5]." The method of hierarchical clustering can be split into two main phases, similarity analysis, and tree construction [6]. The input into the algorithm consists of a matrix with pairwise similarities or dissimilarities between the airports. For our analysis, we used Euclidean distance to compute pairwise dissimilarities between the airports. Hierarchical clustering tree construction algorithms generally fall into one of two categories, agglomerative or divisive. Agglomerative methods build the tree starting at the node level, while divisive methods split the tree starting from the top [5]. For this analysis, we considered only the

agglomerative methods of complete-linkage, Ward's linkage, and average-linkage. For an agglomerative method, each observation starts out as a single cluster. The two clusters that are the closest to each other using a distance metric are then joined by the distance metric. This step is repeated until all observations are included in the same cluster. Linkage functions define how clusters should be joined past the first cluster containing two elements. Complete linkage uses the maximum distance from the cluster to other observations, while average linkage uses the average distance. Ward's linkage method attempts to form clusters by minimizing the within-cluster distances while maximizing the between-cluster distances. Ward's method joins two clusters A and B that minimize the increase in the sum of squared errors (SSE).

$$I_{AB} = SSE_{AB} - (SSE_A + SSE_B) \quad (1)$$

SSE_{AB} is defined as the between-cluster sum of squared errors, while SSE_A and SSE_B are the within-cluster sum of squared errors. This objective function can also be written as

$$I_{AB} = \frac{n_A n_B}{n_A + n_B} (\bar{a} - \bar{b})' (\bar{a} - \bar{b}) \quad (2)$$

Where $\bar{a}$ and $\bar{b}$ are the centroids of clusters a and b [7].

The results of using a hierarchical clustering algorithm can be visualized using a dendrogram, which displays the distances between each of the observations, and from which specific clusters can be identified. An example figure of a dendrogram is given below in Fig. 1. This sample dendrogram was created using the USArrests dataset, which includes the number of arrests for various violent crimes by state. In the above dendrogram, four different clusters are colored, and the states that are a part of each cluster are labeled. States that are connected at a smaller height value are more similar, and states that are connected larger are less similar. We created a dendrogram for this analysis in order to better visualize the similarities between the airports.

Cluster Dendrogram

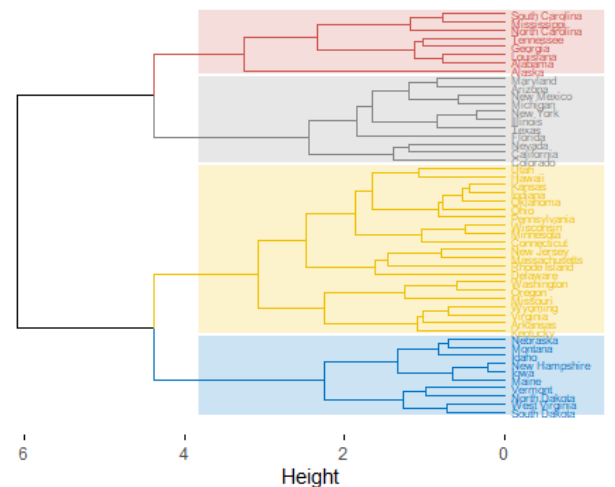


Fig. 1: Example Dendrogram with Colored Clusters (Data: USArrests)

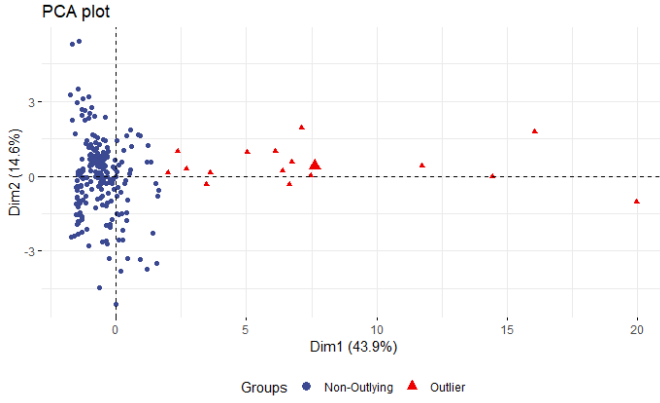


Fig. 2. Principal Components Analysis

IV. DATA ANALYSIS AND RESULTS

A. Analysis

The dataset we used for the analysis contained the columns: jobs, wages, economic output, number of accidents, deaths, serious injuries, minor injuries, uninjured, number of years in the aggregation, years since last accident, and operation counts for air carrier, taxi, general aviation, itinerant military, civil, and local military flights. The commercial status of the airport was not used in performing the principal components analysis (PCA) or clustering because it is a categorical variable. All of the data used in the PCA and clustering analysis was scaled. The principal components analysis plot based on the above columns is shown below in Fig. 2. The majority of airports are clustered in the left of the PCA plot, with very few having large values of component one. Looking at Table 1, this means that the outliers have significantly more jobs, wages, economic output, number

Table 1: Weights for the First Principal Component

Variables	PC1
Jobs	0.33532545
Airport Wages	0.34885708
Airport Economic Output	0.34270204
Number of Accidents	0.25443005
Total Deaths	0.27086070
Serious Injuries	0.31089242
Minor Injuries	0.31021142
Total Uninjured	0.34726439
Number of Years	0.10840761
Years Since Accident	-0.03552965
Air Carrier	0.34830351
Taxi	0.22475540
Genereal Aviation	-0.03822610
Itinerant Military	-0.04870805
Civil	-0.06552281
Local Military	-0.06212784

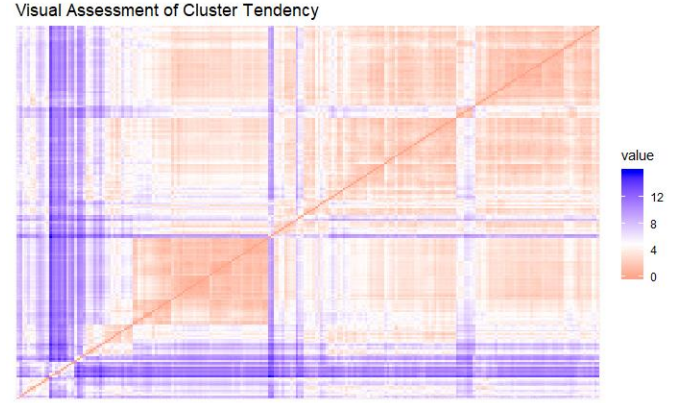


Fig. 3. Visual Assessment of Cluster Tendency

of accidents, deaths, serious injuries, minor injuries, uninjured, number of years in the aggregation, and operation counts for air carrier and taxi flights. They have significantly less years since the last accident, and operation counts for general aviation, itinerant military, civil, and local military flights. That being said, to improve the generality of the analysis, airports with an outlying first principal component were excluded.

In order to use a clustering algorithm, it must first be shown that there are significant clusters in the data either through the Hopkins test or the visual assessment of cluster tendency (VAT). The Hopkins test is a statistical hypothesis test where the null hypothesis states that the data are uniformly distributed. The alternative hypothesis states that there are significant clusters in the data. The threshold for rejecting the null hypothesis using the test statistic H is 0.5, values that are closer to 1 correspond to data sets that are uniformly distributed, and values that are closer to 0 contain meaningful clusters. Since the data has a Hopkins test statistic of 0.0533, which is less than the threshold of 0.5, the data is considered to have significant clusters. The result of the Hopkins test is confirmed using the VAT, as seen through the patchwork pattern in Fig. 3. The clearly defined red squares indicate there are significant clusters in the data. If the majority of the patchwork was blue, then there would not be significant clusters in the data.

After performing a comparison of k-means clustering and hierarchical clustering, hierarchical clustering with two clusters was found to be the best fit for the data. The results of the comparison using three metrics are shown below in Table 2.

The hierarchical clustering was carried out using Ward's D linkage, which is described in the Approach section. The graphical visualizations of the two resulting clusters are below with an abstracted dendrogram in Fig. 4, and a cluster plot in Fig. 5. Additionally, the cluster means are displayed in Table 3. The main difference between the two clusters is that the second cluster has significantly higher values of every variable except general aviation and civil operations. An expanded version of

Table 2: Optimal Clustering Method

	Score	Method	Clusters
Connectivity	8.1544	Hierarchical	2
Dunn	0.3305	Hierarchical	2
Silhouette	0.5396	Hierarchical	2

Cluster Dendrogram

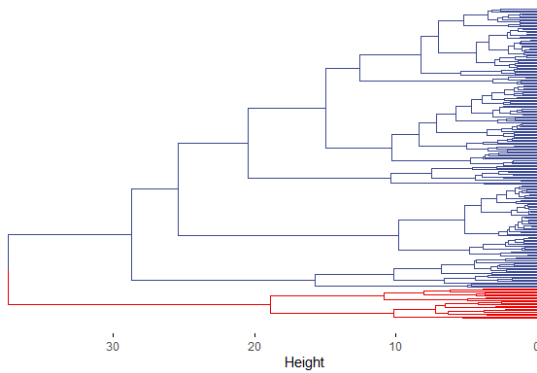


Fig. 4: Full Dendrogram

the second cluster is shown below in Fig. 6.

It can be seen from the full dendrogram that the airports in the second cluster are more similar to each other in the first cluster, and there are only 21 airports in the second cluster while there are 190 airports in the first. Within the second cluster, there are two distinct subclusters, one which appears to have airports serving larger regions such as Houston (HOU) or New Orleans (MSY), and the other subcluster contains airports serving smaller cities such as Jacksonville (JAX), or mixed civilian and military airports like Savannah and Hilton Head Airport (SAV).

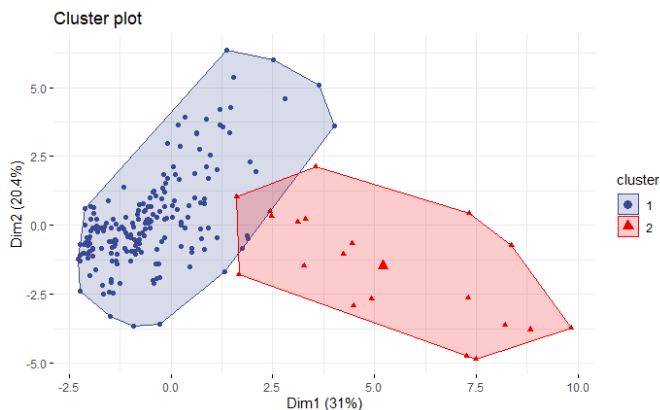


Fig. 5: Cluster Plot Derived from the Hierarchical Clustering

Cluster 2

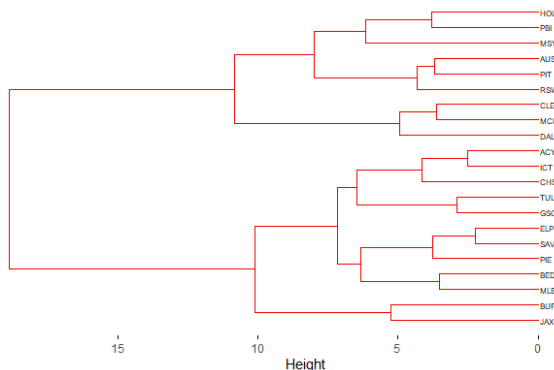


Fig. 6: Dendrogram of Cluster 2

Table 3: Cluster Means for each Variable

Variables	Cluster 1	Cluster 2
Jobs	3063.753	38358.381
Airport Wages	132392076	1484013340
Airport Economic Output	425820783	5050143242
Number of Accidents	16.71579	24.42857
Total Deaths	5.384211	11.000000
Serious Injuries	2.305263	4.000000
Minor Injuries	3.994737	8.238095
Total Uninjured	46.41053	380.52381
Number of Years	28.29474	36.76190
Years Since Accident	4.289474	5.142857
Air Carrier	3913.832	62734.667
Taxi	9846.442	17571.571
General Aviation	29649.52	30696.67
Itinerant Military	2789.584	4657.048
Civil	27217.300	9489.429
Local Military	2268.032	2083.143

From the cluster plot (Fig. 6), there is some overlap between the two clusters, which means that some elements from the second cluster could belong in the first cluster.

The silhouette plot/index can be used to internally validate the groupings for each of the clusters. A negative silhouette index indicates that the observation potentially belongs in a different cluster. The silhouette plot is below in Fig. 7. From this plot, it can be seen that a few members of the first cluster do not belong in the cluster, and approximately a fourth of the members in the second cluster do not belong. Overall, the hierarchical clustering performs relatively well with an average silhouette distance of 0.43, indicated by the red dashed line on the plot. The clustering analysis described above was then used to design an interface to connect airports looking to build a new ATCT to similar airports with existing ATCTs.

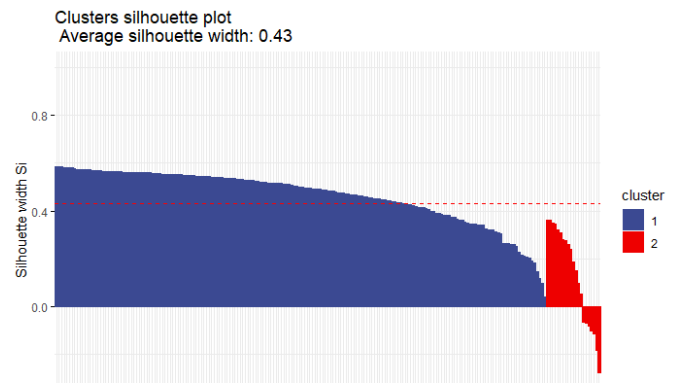


Fig. 7: Silhouette Method Plot

Airport Towering Interface

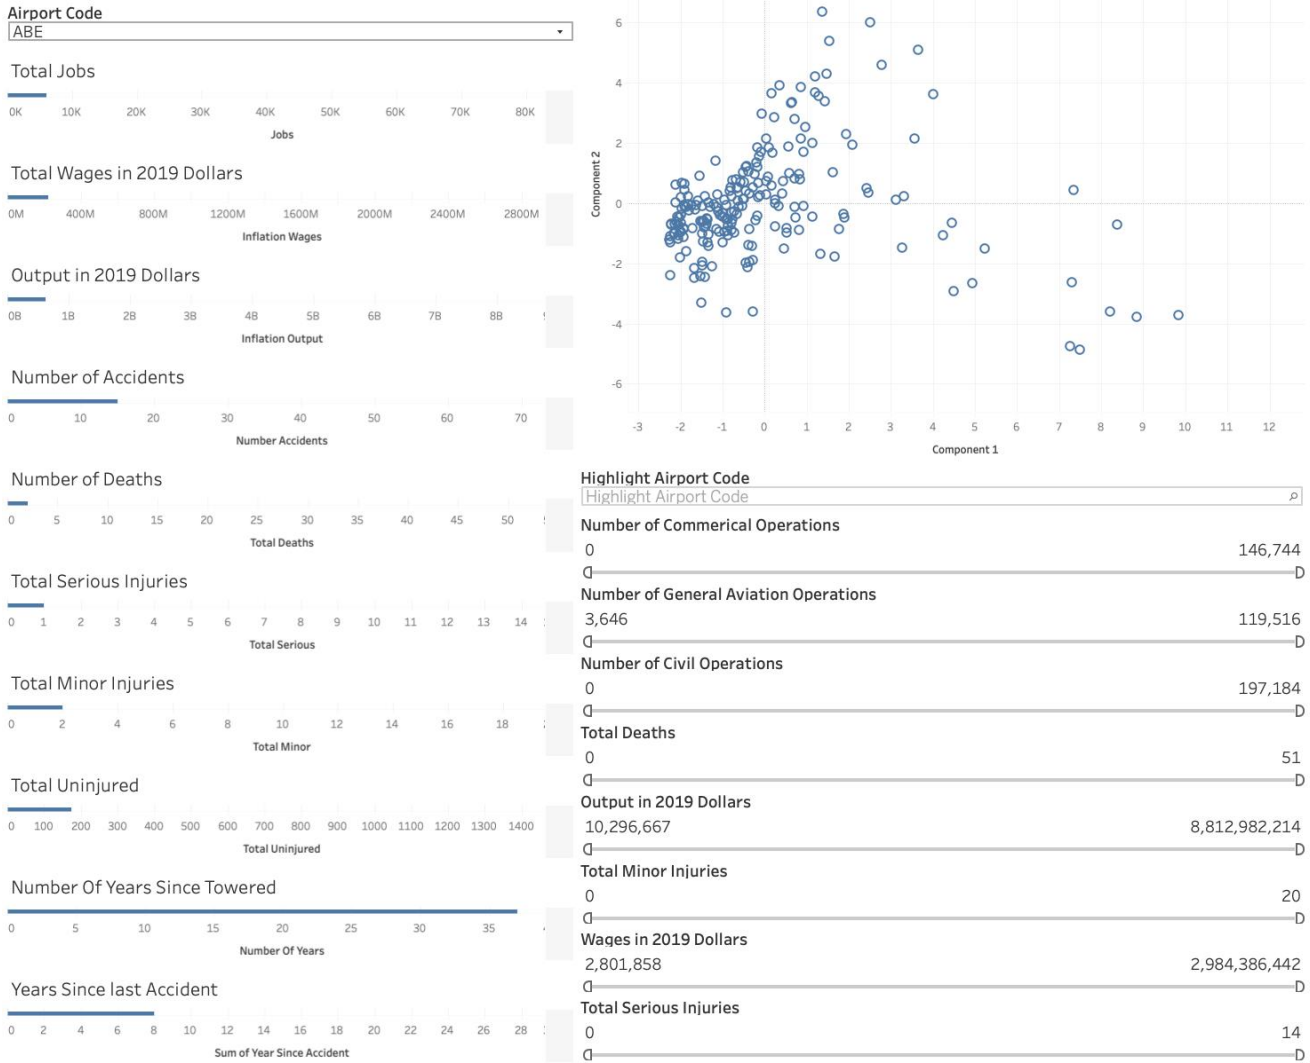


Fig. 8: Interface Design

B. Results and Deliverables

With the clustering results from above, we decided to build a user interface system that would easily allow key stakeholders to access this information, and allow for the individual adjustment of desired metrics. The interface gives users background statistics on any airport they select as well as a visualization for the similarities among different airports. We decided to build this interface using Tableau so that the data can be easily visualized. In addition, Tableau can connect to R, which provides the ability to bring statistical analysis into a visual analytics environment.

The interface itself is divided into two sides, left and right (Fig. 8.). By selecting an airport code from the dropdown menu on the left hand side, the interface returns various economic, efficiency, and safety statistics on the airport in the form of bar charts. There are a total of sixteen different metrics, including the number of jobs the airport employs, total wages it outputs, number of accidents it has experienced, number of operations it

carries out annually, and more. On the right hand side, there is a similarity plot as well as the same sixteen statistics, but in the form of slider bars. The user can adjust these sliders to narrow down the data points on the similarity plot, showing the user which airports fall into the specified range of statistics as well as how similar the displayed airports are to each other. Furthermore, the user can select a particular airport code from a dropdown menu below the similarity plot to highlight that airport's exact position on the similarity plot.

The visualization of the data for each airport, as well as the ability to adjust metrics to resemble an airport in question, aids the user in deciding whether a tower is appropriate or not for said airport. As opposed to simply returning a number or ratio, this provides a more comprehensive and in-depth view into the intricacies of the decision to tower.

V. CONCLUSION

In performing PCA and hierarchical clustering analysis, we produced an interface that aids in the decision of whether an

airport should establish a tower. The clustering analysis groups airports using a given set of variables, and with this technique, we are able to provide users with a list of comparable airports that have towers, as well as information about the airports' economic, safety, and efficiency; the interface also provides users with a point of contact for comparable airports. These resources provide the user with a greater insight into potential benefits associated with having an ATCT. It also addresses the robustness issues associated with the current establishment criteria through the capability of dynamic data and ease of statistical analysis, which allows the interface to be updated with new data as it is collected. As the FAA has constrained resources and budget, and the cost to build a physical tower increases, this updated decision aid is integral in providing more information to airports looking to build an ATCT.

ACKNOWLEDGMENT

Thank you, Professor Cody Fleming, for giving us guidance throughout this entire project.

REFERENCES

- [1] Federal Aviation Administration, *Air Traffic Control*. Washington DC: Air Traffic Organization, 2019.
- [2] S. D. Van Beek "Remote towers: A better future for America's small airports," *reason.org* para. July 2019. [Online]. Available: <https://reason.org/wp-content/uploads/files/air-traffic-control-remote-towers.pdf>. Accessed Mar. 26, 2020].
- [3] Martin, G. A. (n.d.). Faa Contract Tower (Fct) New Start and Replacement Tower Process. FAA Contract Tower (FCT) New Start and Replacement Tower Process.
- [4] A. Kassambara, *Practical Guide to Cluster Analysis in R*, STHDA, 2017.
- [5] V. Cohen-Addad, V. Kanade, F. Mallmann-Trenn, and C. Mathieu, "Hierarchical clustering: Objective functions and algorithms," *Journal of the ACM*, vol. 66, no. 4, pp. 261-303, 2019.
- [6] P. Daie and S. Li, "Managing product variety through configuration of pre-assembled vanilla boxes using hierarchical clustering," *International Journal of Production Research*, vol. 54, no. 18, pp. 5468-5479, 2016.
- [7] T. Strauss and M. Johan von Maltitz, "Generalising Ward's method for use with Manhattan distances," *PLoS ONE*, vol. 12, no. 1, pp. 1-21, 2017.